


STATIC CONTROL FILM DATA SHEET

BP350

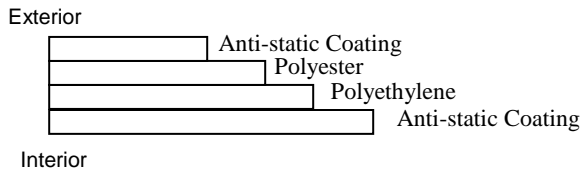

Bennett & Bennett
 1318 Kenton Street
 Springfield, Ohio 45505
 Phone: (888) 4BENNETT
 Fax: (937) 324-8753
www.bennettbennett.com

Physical Description:
 Clear laminated PET/Poly film with anti-static
 Coating on both the inside and outside of film

Application:

This strong static control film provides moderate barrier protection and has good clarity. It's anti-static coating reduces triboelectric charges to protect ESD sensitive devices. The film is Amines & Amide Free.

Converting:

It is usually converted into sheeting, tubing and 2-seal pouches

Physical Properties:

PROPERTIES	TEST METHOD	UNIT OF MEASURE	TYPICAL VALUE
Caliper	Micrometer	mils	3.0 +/- 5%
Yield		sq. in/lb	9,610
MVTR	ASTM F1249	gms/100 sq. in./24 hrs	.3
Tensile	D-882	lbs. at break	15
Tear	Method 2065	lbs. at break	2.5
Puncture	FTMS 101 C	lbs. at break	>10
Surface Resistivity	ASTM D-257 at 15% RH	Ohms/sq.	10 ⁹ - 10 ¹¹

The values indicated in this document are the results of tests made in compliance with the normal standards. They are given as an indication and should be considered as average values.