





## Cleanroom Anti Fatigue Mats

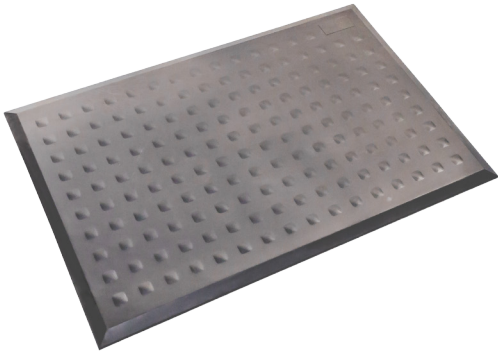

Developed to prevent fatigue in controlled environments, our Cleanroom Anti-Fatigue Mats offer a unique and comfortable 100% premium molded urethane standing surface specifically designed for ISO Class 5 cleanrooms and above.

More resilient than other compounds, this urethane provides an exceptionally high-level of long-term performance and comfort. In fact, we've given it a 10 year resilience warranty because of our confidence that this material will not crush down during normal use.

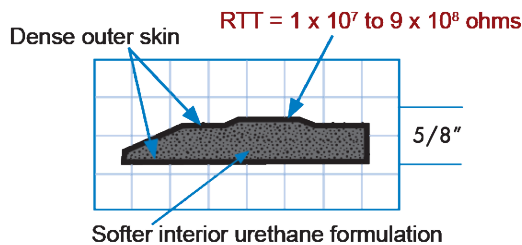

SPECIFICATIONS AND TESTING	
<b>Compound</b>	5/8" thick molded Urethane
<b>Edges</b>	Safety beveled
<b>Surface Particulation</b>	No base material emissions being generated
<b>Dynamic Headspace</b>	IEST-RP-CC031.2 A very low level of organics
<b>Resistivity</b>	EOS/ESD 7.1 (RTT) and (RTG) = $1 \times 10^7$ to $9 \times 10^8 \Omega$
<b>Coefficient of Friction</b>	ASTM F1677: Dry: .75
<b>Tabor Abrasion</b>	Fed. Std. 191: < 1% lost @ 1,000 cycles
<b>Warranty</b>	10 years

**Surface Particulation** - Tested for Base Material Shedding and Operational Wear, our mats show no base material emissions being generated. This resulted in an ISO Class 5 Cleanroom certification from Acorn Industries - Approved by Dr. Philip Austin. Full Test Analysis Available Upon Request.

**Dynamic Headspace** - Tested per IEST-RP-CC031.2 specifications. This is a Volatile Organic Compound Analysis that determines the level of outgassing of Toxic Organic Compounds. The test results showed a very low level of organics. Full Test Analysis Available Upon Request.

**Resistivity** - For Critical Environments where Static Electricity is an issue, our mats have an (RTT) and (RTG) rating of  $1 \times 10^7$  ohms to  $9 \times 10^8$  ohms. Each mat has one grounding snap.

**Cleaning** - To clean, simply wipe down with a pre-moistened alcohol-based clean room wipe. We sell multiple varieties. For use in sterile applications, our mats can be autoclaved ( $275^{\circ}\text{F}$  for 20 minutes at 15 PSI) or gamma sterilized.

CORPORATE OFFICES: 1318 Kenton Street, Springfield, OH 45505

TOLL FREE: (888) 423-6638

FAX: (937) 324-8753

E-MAIL: sales@bennettbennett.com