



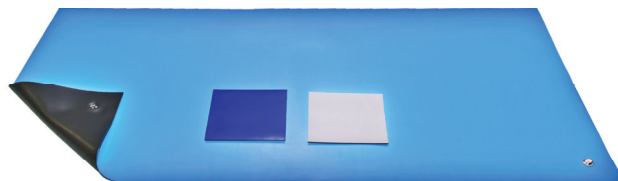

Material Specifications

5500 Series Mats

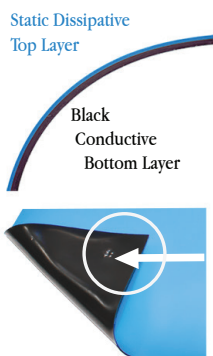

5500 Series Mats are grounded by installing 4730 Series ESD Mat Snaps so that a common point ground cord can be installed.

5500 Series			
Physical Properties	Units	Typical Values	Method / Standard
Thickness	Inches	.060	ASTM D-2103
Electrical Properties	Units	Typical Values	Method / Standard
Surface Resistivity • Top to Top	ohms / sq.	$10^6 - 10^9$	S20.20 STM S4.1
Surface Resistivity • Top to Ground	ohms / sq.	$10^6 - 10^9$	S20.20 STM S4.1
Static Decay	Volts	< 0.01 seconds	FTMS 101C Method 4046

- This product meets the ANSI/ESD S20.20 STM S4.1 Standard using FTMS 101C Method 4046

MAIL: 1318 Kenton Street Springfield, OH 45505 E-MAIL: sales@4bennett.com WEBSITE: 4bennett.com

TOLL FREE: (888) 423-6638 OFFICE: (937) 324-1100 FAX: (937) 324-8753